

REF.

KOGOI LS LED DIM0-10V
KOGOI LS LED DIMDALI & DIMBT

LIGHT SOURCE

Class I



120 - 277V: Dimmable 0-10V & DALI
220 - 240V: Bluetooth Dimming

Driver:

CC 3000mA

LED Integrated:

Led module 350mA, 646,8lm/module
Energy class A*

4000/5000K, CRI80/90, 90W, 50-60Hz

PACKAGING

Box size:

Body

Box 1: 163 × 58 × 70 cm | 1,66 m³ | 53 Kg

Head + Tail

Box 2: 129 × 76 × 137 cm | 1,343 m³ | 75 Kg

Weight: Gross - 128 Kg | Net - 23 Kg

MATERIALS & COMPONENTS

Oak & Birch Wood

Wood Veneer Diffuser

Brushed Nickel Metal Canopy:

34 × 11,5 × 5 cm - DIM0-10V & BT

56 × 16 × 6 cm - DALI

4 Steel Cables: 5 m drop

Transparent Electrical Cable 5 m drop

FINISHES

WOOD VENEER




20 Ivory White



22 Natural Beech

References

 KOI LS LED DIM0-10V

 KOI LS LED DIMBT

Certificates



Class I



Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V



Only wood shade colours are FSC® certified

Wood shade colours

-  20 Ivory White
-  22 Natural Beech



Components



Metal Canopy
Brushed nickel
56 x 16 x 6 cm

Electrical cable
Transparent
5 m drop

Steel cable
4 x 5 m drop



Box size
Body
box 1: 229 x 80 x 92 cm
1,685 m³ | 117 Kg
Head + Tail
box 2: 166 x 107 x 188 cm
3,339 m³ | 148 Kg





Weight
Gross - 265 Kg
Net - 33 Kg





Required
Shades mount
Difficulty: *****





LED
 Linear Module
24 x 5,5 W

Energy class
 LED integrated



Driver
 MEANWELL
1 unit - Ref. NPF 90D-30
1 unit - Ref. NPF 60D-20
 MEANWELL
1 unit - Ref. NPF 90D-30
1 unit - Ref. NPF 60D-20
+
Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD
Driver housed in canopy.

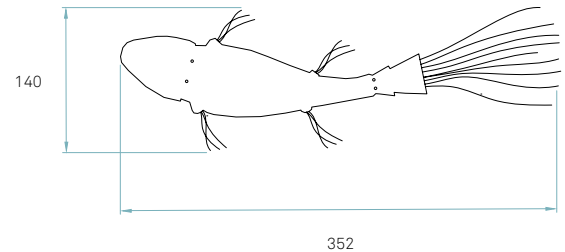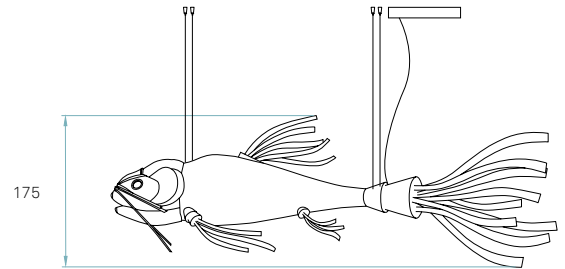

Details

Input Voltage	Luminous Flux	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	N/A	90	160 W	4000 K (20)	40000h
		80		5000 K (22)	