

References

NWAV S LED DIM0-10V

NWAV S LED DIMBT

Awards

GOOD DESIGN
GREEN GOOD DESIGN AWARD
Chicago 2018

Certificates



Class I

Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V



Wood shade colours

Exterior & Interior
 26 Red / 24 Yellow

or
Exterior & Interior
 30 Turquoise / 24 Yellow

or
Exterior & Interior
 28 Blue / 24 Yellow

or
Exterior & Interior
 21 Cherry / 20 White

If you would like any other colour combinations please consult with our offices.



REF. NWAV S LED 28-24
New Wave

Components




Metal canopy
Brushed Nickel
34 x 11,5 x 5 cm

Electrical cable
Transparent 2 m drop



Steel cable
4 x 2 m drop



Packaging



Box size
121 x 31 x 34 cm

Box volume
0,128 m³

Weight
Gross - 6 Kg
Net - 2,8 Kg

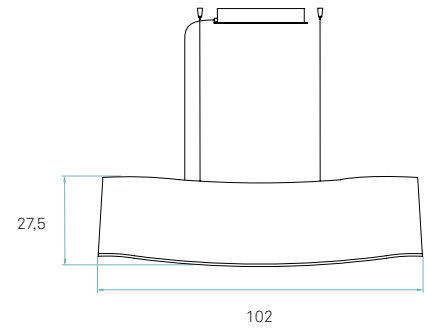

LED
 Linear Module
2 x 5,5 W 350mA

Energy class
 A+
LED integrated



Driver
 EFORE
1 unit - Ref. RCL015-0440A
 EFORE
1 unit - Ref. RCL015-0440A
+ Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD
Driver housed in canopy.

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	760 lm	90	16 W	3000 K	40000h

* Measurements taken using Blue exterior & Yellow interior shades, Veneer Ref: 28 Blue & 24 Yellow